



Switchable driver option for quick and easy installation



Coastal Protected



IP68 ideal for outdoor areas and under water lighting

WARRANTY

Warranty

7 years

FEATURES & BENEFITS

Complete with wall fixings

Robust cable for use outdoors

Tilt & rotate for adjusting light

Available in an array of colours

Long lifetime of 70,000hrs

PATENT: **GB2544975 EP3176502**



Stainless Steel



Antique Brass



Black



Bronze

UL010

Universal LED light

FEATURES

| | |
|------------------------|------------------|
| IP rating | IP68 |
| CSP Switchable | Single CCT |
| Tilttable (°) | 360 |
| Dimmable Option | Driver dependent |
| LED Lifetime | L70 70,000h |
| Colour Rendering Index | CRI>80 |
| Colour Consistency | SDCM3 |
| Rotation angle (°) | 360 |

INSTALLATION INFORMATION



| | |
|-----------------------------|--|
| Input | 150mA / 250mA / 350mA / 500mA / 700mA DC |
| Maximum Ambient Temperature | 55°C |
| Weight | UL010A: 562g, UL010BK: 332g, UL010SS: 500g, UL010BZ: TBC |
| Inrush Current | N/A |
| Construction Material | Black |
| UK Bathroom Zone | 0 |
| SELV | N/A |
| Electric Class (1, 2, 3) | III |
| Earth Leakage | N/A |
| Suitable for coastal areas | Yes |

PHOTOMETRICS @ 25°C

| Product code | Finish | W | Colour | Beam | lm | lm/W | Energy |
|--------------|---------------|--------------------------------|--------|------|----------|-----------|--------|
| UL010AB22XF | Antique brass | 0.4W / 0.7W / 1W / 1.5W / 2.2W | 2200K | 40° | 51 - 196 | 89 - 120 | |
| UL010AB27XF | Antique brass | 0.4W / 0.7W / 1W / 1.5W / 2.2W | 2700K | 40° | 51 - 196 | 89 - 120 | |
| UL010AB30XF | Antique brass | 0.4W / 0.7W / 1W / 1.5W / 2.2W | 3000K | 40° | 54 - 210 | 95 - 129 | |
| UL010AB40XF | Antique brass | 0.4W / 0.7W / 1W / 1.5W / 2.2W | 4000K | 40° | 60 - 234 | 106 - 143 | |
| UL010BK22XF | Black | 0.4W / 0.7W / 1W / 1.5W / 2.2W | 2200K | 40° | 51 - 196 | 89 - 120 | |
| UL010BK27XF | Black | 0.4W / 0.7W / 1W / 1.5W / 2.2W | 2700K | 40° | 51 - 196 | 89 - 120 | |
| UL010BK30XF | Black | 0.4W / 0.7W / 1W / 1.5W / 2.2W | 3000K | 40° | 54 - 210 | 95 - 129 | |
| UL010BK40XF | Black | 0.4W / 0.7W / 1W / 1.5W / 2.2W | 4000K | 40° | 60 - 234 | 106 - 143 | |
| UL010BZ22XF | Bronze | 0.4W / 0.7W / 1W / 1.5W / 2.2W | 2200K | 40° | 51 - 196 | 89 - 120 | |
| UL010BZ27XF | Bronze | 0.4W / 0.7W / 1W / 1.5W / 2.2W | 2700K | 40° | 51 - 196 | 89 - 120 | |

Energy rating is a reflection of the LED light source.

BEAM ANGLE: **40°**

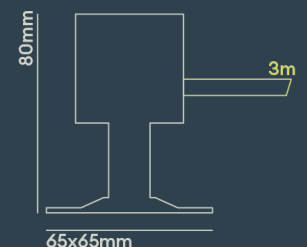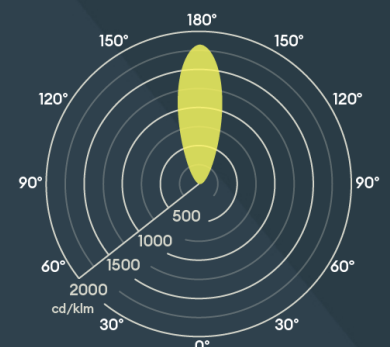



WIRING INFORMATION

| | |
|--------------------------------|---|
| Cable / Flying Lead | 3m (H05RN-F) rubberised cable (outside diameter: 6mm) |
| Type of Wiring Required | Series |

LED DRIVER

| Driver | Input | SELV | Dimming | Bathroom Zone |
|---------------------------|----------|------|---------|---------------|
| DRV150700 (all settings) | 220-240V | Yes | No | N/A |
| DRV350700TD (350 & 500mA) | 220-240V | Yes | Yes | N/A |
| DRV350700TD (700mA) | 220-240V | Yes | Yes | N/A |

ACCESSORIES

| | | |
|----------------------|---|-----------------|
| JB2 / JB4 | Waterproof junction box / Gel filled waterproof connector | Sold Separately |
| WCR 275 BLACK | 2-core rubber cable | Sold Separately |

UL010 Modular is a versatile, swivel-mounted universal light that offers endless possibilities and ensures that any corner of a landscape can be lit, whether that's a pond, tree, or anything in-between. With a 360° stainless-steel bracket, 12° or 40° beam angle, IP68 water-resistance rating, and coastal protection, this feature light is a perfect addition. Available in new colours featuring stainless steel, bronze, black, and antique brass.