



CCT switchable between 3000K, 4000K & 6000K



Wattage switchable options from 5W to 20W



IK09 for impact protection

**WARRANTY**

Warranty	5 years
Battery Warranty	5 years
On-Site Warranty	2 years

**FEATURES & BENEFITS**

- IP65 suitable for use outside under a canopy
- Slim depth of just 80mm
- Ultra efficient up to 156 lm/W for fast paybacks
- 4-way conduit entry points & BESA
- Detachable terminal block for convenient wiring
- Modular design for tool-less installation
- Versabox plug and play kit range to accommodate project requirements
- WLKITMWS microwave sensor is commissioned with a remote control to aid easy adjustment of settings once installation is complete. Use UNREMOEMWS.



**Black eyelid**  
WL95BE  
300mm only

**White eyelid**  
WL95BEW  
300mm only

**WL95 VERSA**

CCT Colour & Wattage Switchable Bulkhead with plug-in Versabox accessories

**FEATURES**



<b>IP rating</b>	IP65
<b>IK rating</b>	IK09
<b>CSP Switchable</b>	Switchable CCT
<b>Sensor Option</b>	Microwave + Photocell options
<b>Dimmable Option</b>	Yes (DALI-2, PUSH-DIM)
<b>LED Lifetime</b>	L70 50,000h
<b>Colour Rendering Index</b>	CRI>80
<b>Colour Consistency</b>	SDCM4
<b>Emergency Option</b>	Yes, Manual, Self and DALI-2 Test

**INSTALLATION INFORMATION**

<b>Input</b>	220-240V AC
<b>Maximum Ambient Temperature</b>	-20°C - 40°C
<b>Weight</b>	0.6 - 0.9kg
<b>Inrush Current</b>	8W: 14A 0.12ms, 20W: 25A 0.26ms
<b>Construction Material</b>	ABS Housing (RAL9003), Anti-UV Diffuser, 850°
<b>UK Bathroom Zone</b>	2
<b>Electric Class (1, 2, 3)</b>	II
<b>Install Connector Type</b>	Push-fit terminal, loop-in/loop-out
<b>UK Building Regulations</b>	Part L
<b>Mounting Options</b>	Ceiling & wall
<b>Power Factor</b>	0.9

**Photometrics @ 25°C**

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	Energy
WL95B2NEMCS	Black	250mm On-Off Manual Emergency	115°	6.5W	6000K	1000	154	A t G C
					3000K	1200	150	
				8W	4000K	1250	156	
WL95B3NEMCS	Black	300mm On-Off Manual Emergency	115°	10W	3000K	1450	140	A t G C
					4000K	1500	150	
					6000K	1500	150	
				15W	3000K	2100	140	
					4000K	2200	147	
					6000K	2200	147	
WL95B2NMCS	Black	250mm On-Off Microwave	115°	5W	3000K	2800	140	A t G C
					4000K	3000	150	
					6000K	3000	150	
				6.5W	3000K	700	140	
					4000K	750	150	
					6000K	750	150	
WL95B3NMCS	Black	300mm On-Off Microwave	115°	10W	3000K	950	146	A t G C
					4000K	1000	154	
					6000K	1000	154	
				8W	3000K	1200	150	
					4000K	1250	156	
					6000K	1250	156	

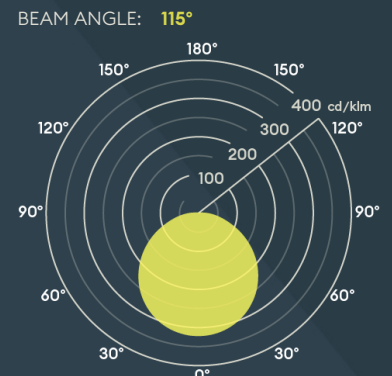



WL95 Versa is the ultimate bulkhead, with CCT adjustable from warm 3000K to bright 6000K and wattage options ranging from 5W to 20W, all packed in a slim, impact-resistant (IK09) and weatherproof (IP65) design. Plus with high efficiency of up to 154lm/W. This bulkhead offers easy installation with 4-way conduit entry, detachable terminal block, and tool-less modular design, and is compatible with Versabox plug-and-play kits for ultimate project customization.

Model	Color	Control	Beam Angle	Wattage	3000K	4000K	6000K	Efficiency (lm/W)	Notes						
WL95B2NMEMCS	Black	250mm On-Off Microwave Manual Emergency	115°	15W	3000K	2100	140	140	A t G C						
					4000K	2200	147	147							
					6000K	2200	147	147							
					20W	3000K	2800	140		140					
						4000K	3000	150		150					
						6000K	3000	150		150					
				5W	3000K	700	140	140							
					4000K	750	150	150							
					6000K	750	150	150							
					6.5W	3000K	950	146		146					
						4000K	1000	154		154					
						6000K	1000	154		154					
WL95B3NMEMCS	Black	300mm On-Off Microwave Manual Emergency	115°	10W	3000K	1450	140	140	A t G C						
					4000K	1500	150	150							
					6000K	1500	150	150							
					15W	3000K	2100	140		140					
						4000K	2200	147		147					
						6000K	2200	147		147					
				20W	3000K	2800	140	140							
					4000K	3000	150	150							
					6000K	3000	150	150							
					WL95W2NECS	White	250mm On-Off Self Test Emergency	115°		5W	3000K	700	140	140	A t G C
											4000K	750	150	150	
											6000K	750	150	150	
6.5W	3000K	950	146	146											
	4000K	1000	154	154											
	6000K	1000	154	154											
8W	3000K	1200	150	150											
	4000K	1250	156	156											
	6000K	1250	156	156											
	WL95W3NECS	White	300mm On-Off Self Test Emergency	115°					10W	3000K	1450	140	140	A t G C	
										4000K	1500	150	150		
										6000K	1500	150	150		
15W					3000K	2100	140	140							
					4000K	2200	147	147							
					6000K	2200	147	147							
20W					3000K	2800	140	140							
					4000K	3000	150	150							
					6000K	3000	150	150							
					WL95W3DEDCS	White	300mm DALI-2 Emergency	115°	10W	3000K	1450	140	140		A t G C
										4000K	1500	150	150		
										6000K	1500	150	150		
15W	3000K	2100	140	140											
	4000K	2200	147	147											
	6000K	2200	147	147											
20W	3000K	2800	140	140											
	4000K	3000	150	150											
	6000K	3000	150	150											
	WL95W2NMECS	White	250mm On-Off Microwave Self Test Emergency	115°					5W	3000K	700	140	140	A t G C	
										4000K	750	150	150		
										6000K	750	150	150		

## WIRING INFORMATION

<b>Cable / Flying Lead</b>	Push-fit terminals, 2.5mm <sup>2</sup> max, loop-in/loop-out.
<b>Type of Wiring Required</b>	Parallel

## ACCESSORIES

<b>WLKITMANEM</b>	Manual Test Emergency plug-in Versabox, 250lm	Sold Separately
<b>WLKITSELFEM</b>	Self Test Emergency plug-in Versabox, 250lm	Sold Separately
<b>WLKITPC</b>	Photocell plug-in Versabox (must be used with UNREMOTEMWS)	Sold Separately
<b>WLKITMWS</b>	Microwave Sensor on/off plug-in Versabox (must be used with UNREMOTEMWS)	Sold Separately
<b>UNREMOTEMWS</b>	Remote control for use with microwave sensor	Sold Separately
<b>WL95BEW</b>	White Eyelid Accessory (300mm only)	Sold Separately
<b>WL95BE</b>	Black Eyelid Accessory (300mm only)	Sold Separately



**COLLINGWOOD**  
LIGHTING

LIGHTING INNOVATION

WL95 Versa is the ultimate bulkhead, with CCT adjustable from warm 3000K to bright 6000K and wattage options ranging from 5W to 20W, all packed in a slim, impact-resistant (IK09) and weatherproof (IP65) design. Plus with high efficiency of up to 154lm/W. This bulkhead offers easy installation with 4-way conduit entry, detachable terminal block, and tool-less modular design, and is compatible with Versabox plug-and-play kits for ultimate project customization.