



IP66

IP66 ideal for internal or external applications

2000lm

High lumen output of up to 2000lm

IK08

Robust impact rating of IK08

QUBO

Architectural projector feature light for indoor and outdoor applications

FEATURES

IP rating	IP66
IK rating	IK08
CSP Switchable	Single CCT
Tilttable (°)	120
Sensor Option	PC Dusk to Dawn
Dimmable Option	No
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Rotation angle (°)	60

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 30°C
Weight	QBAL: 1700g, QBAM: 700g
Inrush Current	QBAL: 12A 0.156ms, QBAM: 3.5A 0.14ms
Construction Material	Aluminium Housing, PMMA Diffuser, Grade 304 Screws
SELV	Yes
Electric Class (1, 2, 3)	I
Earth Leakage	0.1
Suitable for coastal areas	No

WARRANTY

Warranty

5 years

FEATURES & BENEFITS



Outdoor LED projector with bracket and spike for installation on floor or ground

Adjustable, rotation 0-60°, 0-120° tilt

Precision tilting degree marker on the product to facilitate orientation

Neoprene H05RN-F 2x0.75mm2 cable of 2000mm

PHOTOMETRICS @ 25°C

Product code	Finish	Type	W	Colour	Beam	lm	lm/W	Lx @ 1m	Energy
QBAMN30	Anthracite grey RAL7016	Medium	10W	3000K	30°	1000	100	2141	
QBALN30	Anthracite grey RAL7016	Large	18W	3000K	30°	2000	111	4402	

WIRING INFORMATION

Cable / Flying Lead	2m Neoprene H05RN-F 3x0.75mm2 cable supplied
Type of Wiring Required	Parallel


LED DRIVER

Driver	N/A (integrated driver)
---------------	-------------------------

ACCESSORIES

N/A	No accessories required
------------	-------------------------

BEAM ANGLE: **30°**

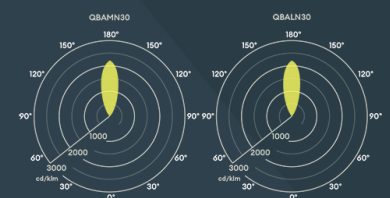

70mm 85mm



QBAMN30

110mm 125mm



QBALN30